SAVE TIME WITH FASTER PTZ TESTING

Climbing up to the top of your ladder to set up a PTZ system, climbing down to test it, climbing up to adjust it...sound familiar? You can save lots of time with your PTZ testing (and CCTV testing in general!) with a test monitor.

Both of our test monitors (LCD350 & LCD330) allow you to adjust PTZ settings which means you can set up and adjust your system on your ladder, straight after installation.


This cuts down on the time spent

labouring back and forth and means you get an instant look at what you're adjusting.

To test your PTZ you need to make sure the Protocol and Baud rate of the test monitor and PTZ are the same before connecting the test monitor to the PTZ via a RS485 cable. After a brief configuration you can then go about testing your PTZs movement whilst viewing the results on the screen in front of you! See our diagram below for the set-up.

To avoid any mishaps our test monitors come with wrist or neck straps to allow you to be comfortable and safe.

Our test monitors also allow you to test your monitor output, check video signal strength and test voltage making them an ideal solution to many problems.

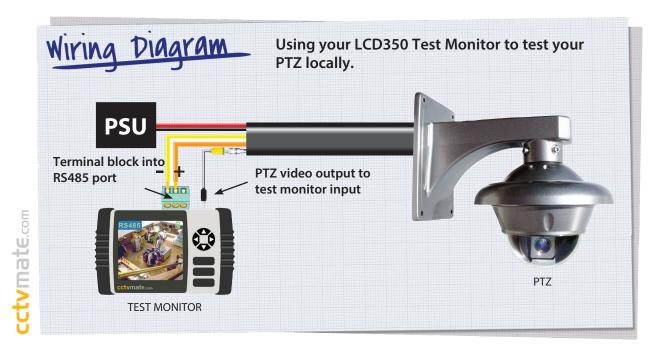

Please Note

These "Technical Tips" help sheets aim to answer commonly asked questions in a concise and informative manner - they are for advice & guidance only and do not replace any of the manuals or other literature supplied with our products.



Last edited: 02/04/2014

